


4"

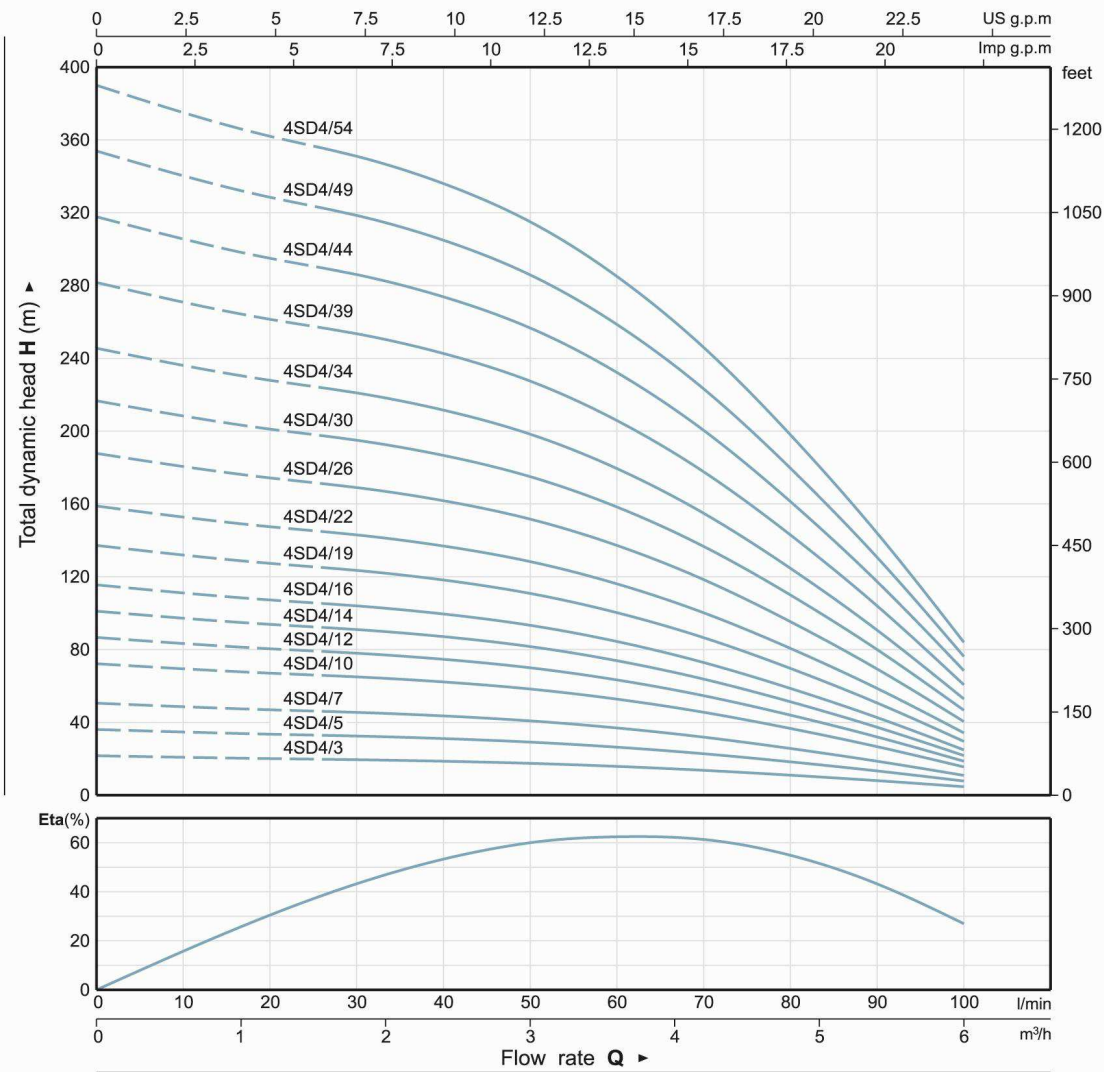

PERFORMANCE DATA 50Hz

MODEL		P ₂		DELIVERY														
1 ~ 220V/240V	3 ~ 380V/415V	KW	HP	Q	n≈2850 1/min													
					m³/h	0	0.6	1.2	1.8	2.4	3.0	3.6	4.2	4.8	5.4	6.0		
				l/min	0	10	20	30	40	50	60	70	80	90	100			
4SDM4/3	4SD4/3	0.25	0.33	H(m)	22	21	20	19	19	17	16	14	11	8	5			
4SDM4/4	4SD4/4	0.37	0.5		29	28	27	26	25	23	21	18	15	11	6			
4SDM4/5	4SD4/5	0.37	0.5		36	35	34	32	31	29	26	23	18	13	8			
4SDM4/6	4SD4/6	0.55	0.75		43	42	40	39	37	35	32	27	22	16	9			
4SDM4/7	4SD4/7	0.55	0.75		51	49	47	45	44	41	37	32	26	19	11			
4SDM4/8	4SD4/8	0.75	1		58	56	54	52	50	47	42	36	29	21	12			
4SDM4/10	4SD4/10	0.75	1		72	69	67	65	62	58	53	46	37	27	16			
4SDM4/12	4SD4/12	1.1	1.5		87	83	80	78	75	70	63	55	44	32	19			
4SDM4/14	4SD4/14	1.1	1.5		101	97	94	91	87	82	74	64	51	37	22			
4SDM4/16	4SD4/16	1.5	2		116	111	107	104	100	93	84	73	59	43	25			
4SDM4/19	4SD4/19	1.5	2		137	132	127	124	118	111	100	87	70	51	30			
4SDM4/22	4SD4/22	2.2	3		159	153	147	143	137	128	116	100	81	59	34			
4SDM4/26	4SD4/26	2.2	3		188	181	174	169	162	152	137	118	95	69	40			
-	4SD4/30	3	4		217	208	201	195	187	175	158	137	110	80	47			
-	4SD4/34	3	4		246	236	228	221	212	198	179	155	125	91	53			
-	4SD4/39	4	5.5		282	271	261	254	243	228	206	178	143	104	61			
-	4SD4/44	4	5.5	318	306	295	286	274	257	232	200	161	117	68				
-	4SD4/49	5.5	7.5	354	340	328	319	305	286	259	223	180	131	76				
-	4SD4/54	5.5	7.5	390	375	362	351	336	315	285	246	198	144	84				